
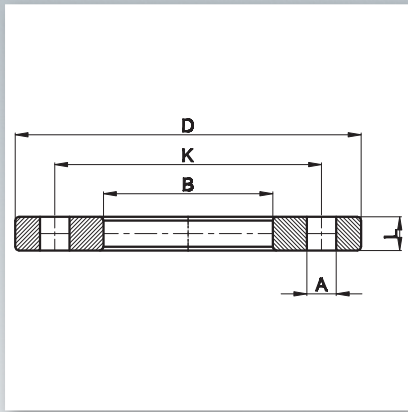


# Flange - Galvanised Steel

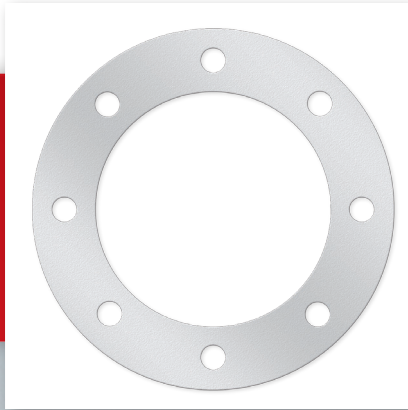

## Galvanised | PN 16

PD (mm)	D (mm)	B (mm)	K (mm)	L (mm)	A (mm)	Bolt diameter	Number of holes	Weight (kg)	Box Quantity
25	105	34	75	TBA	14	M12	4	TBA	1
32	115	42	85	TBA	14	M12	4	TBA	1
40	140	51	100	TBA	18	M16	4	TBA	1
50	150	62	110	TBA	18	M16	4	TBA	1
63	165	78	125	TBA	18	M16	4	TBA	1
75	185	92	145	TBA	18	M16	8	TBA	1
90	200	108	160	TBA	18	M16	8	TBA	1
110	220	128	180	TBA	18	M16	8	TBA	1
125	220	135	180	TBA	18	M16	8	TBA	1
140	250	158	210	TBA	18	M16	8	TBA	1
160	285	178	240	TBA	22	M20	8	TBA	1
180	285	188	240	TBA	22	M20	8	TBA	1
200	340	235	295	TBA	22	M20	12	TBA	1
225	340	238	295	TBA	22	M20	12	TBA	1
250	405	288	355	TBA	26	M24	12	TBA	1
280	405	294	355	TBA	26	M24	12	TBA	1
315	460	338	410	TBA	26	M24	12	TBA	1
355	520	376	470	TBA	26	M24	16	TBA	1
400	580	430	525	TBA	30	M27	16	TBA	1
450	715	517	650	TBA	33	M30	20	TBA	1
500	715	535	650	TBA	33	M30	20	TBA	1
560	840	618	770	TBA	36	M33	20	TBA	1
630	840	645	770	TBA	36	M33	20	TBA	1
710	910	740	840	TBA	33	M33	24	TBA	1

## Galvanised | PN 10

PD (mm)	D (mm)	B (mm)	K (mm)	L (mm)	A (mm)	Bolt diameter	Number of holes	Weight (kg)	Box Quantity
25	105	34	75	TBA	14	M12	4	TBA	1
32	115	42	85	TBA	14	M12	4	TBA	1
40	140	51	100	TBA	18	M16	4	TBA	1
50	150	62	110	TBA	18	M16	4	TBA	1
63	165	78	125	TBA	18	M16	4	TBA	1
75	185	92	145	TBA	18	M16	8	TBA	1
90	200	108	160	TBA	18	M16	8	TBA	1
110	220	128	180	TBA	18	M16	8	TBA	1
125	220	135	180	TBA	18	M16	8	TBA	1
140	250	158	210	TBA	18	M16	8	TBA	1
160	285	178	240	TBA	22	M20	8	TBA	1
180	285	188	240	TBA	22	M20	8	TBA	1
200	340	235	295	TBA	22	M20	8	TBA	1
225	340	238	295	TBA	22	M20	8	TBA	1
250	395	288	350	TBA	22	M20	12	TBA	1
280	395	294	350	TBA	22	M20	12	TBA	1
315	445	338	400	TBA	22	M20	12	TBA	1
355	505	376	460	TBA	22	M20	16	TBA	1
400	565	430	515	TBA	26	M24	16	TBA	1
450	670	517	620	TBA	26	M24	20	TBA	1
500	670	533	620	TBA	26	M24	20	TBA	1
560	780	618	725	TBA	30	M27	20	TBA	1
630	780	645	725	TBA	30	M27	24	TBA	1
710	895	740	840	TBA	30	M27	24	TBA	1
800	1015	843	950	TBA	33	M30	24	TBA	1

Every effort has been made to ensure the information in this brochure is correct at the date of issue. Fusion operates a policy of continuous product improvement and range extension and, therefore, reserves the right to modify product specifications in line with market requirements.