


Flange - Polypropylene with Steel Core



PP | ST37 | PN 16

PD (mm)	D (mm)	B (mm)	K (mm)	L (mm)	A (mm)	Bolt diameter	Number of holes	Weight (kg)	Box Quantity
20	95	28	65	12	14	M12	4	0.244	85
25	105	34	75	12	14	M12	4	0.308	68
32	115	42	85	16	14	M12	4	0.555	52
40	140	51	100	16	18	M16	4	0.835	20
50	150	62	110	18	18	M16	4	1.015	15
63	165	78	125	18	18	M16	4	1.174	15
75	188	92	145	18	18	M16	4	1.506	15
90	204	108	160	20	18	M16	8	1.673	10
110	224	128	180	20	18	M16	8	1.940	10
125	224	135	180	20	18	M16	8	1.785	10
140	252	158	210	24	18	M16	8	2.981	6
160	285	178	240	24	22	M20	8	3.898	6
180	285	188	240	24	22	M20	8	3.560	6
200	340	235	295	27	22	M20	12	5.401	4
225	340	238	295	27	22	M20	12	5.268	4
250	419	288	355	32	26	M24	12	10.530	2
280	419	294	355	32	26	M24	12	9.995	2
315	478	338	410	34	26	M24	12	13.650	2
355	532	376	470	42	26	M24	16	22.203	1
400	592	430	525	46	30	M27	16	28.084	1

PD = pipe diameter

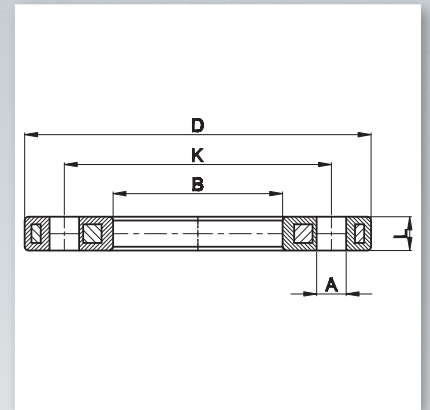

PP | ST37 | PN 10

PD (mm)	D (mm)	B (mm)	K (mm)	L (mm)	A (mm)	Bolt diameter	Number of holes	Weight (kg)	Box Quantity
20	95	28	65	12	14	M12	4	0.244	85
25	105	34	75	12	14	M12	4	0.308	68
32	115	42	85	16	14	M12	4	0.555	52
40	140	51	100	16	18	M16	4	0.835	20
50	150	62	110	18	18	M16	4	1.015	15
63	165	78	125	18	18	M16	4	1.174	15
75	188	92	145	18	18	M16	4	1.506	15
90	204	108	160	20	18	M16	8	1.673	10
110	224	128	180	20	18	M16	8	1.940	10
125	224	135	180	20	18	M16	8	1.785	10
140	252	158	210	24	18	M16	8	2.981	6
160	285	178	240	24	22	M20	8	3.898	6
180	285	188	240	24	22	M20	8	3.560	6
200	340	235	295	27	22	M20	8	5.713	4
225	340	238	295	27	22	M20	8	5.630	4
250	395	288	350	30	22	M20	12	7.727	4
280	395	294	350	30	22	M20	12	7.354	4
315	445	338	400	34	22	M20	12	9.826	2
355	514	376	460	40	22	M20	16	19.472	1
400	571	430	515	40	26	M24	16	21.583	1
450	678	517	620	45	26	M24	20	35.012	1
500	688	533	620	45	26	M24	20	34.629	1
560	799	618	725	50	30	M27	20	49.763	1
630	799	643	723	30	30	M27	20	41.084	1

PD = pipe diameter

Every effort has been made to ensure the information in this brochure is correct at the date of issue. Fusion operates a policy of continuous product improvement and range extension and, therefore, reserves the right to modify product specifications in line with market requirements.